FOR 50 YEARS, MADE IN FRANCE

TEMPERING - COATING MACHINE

GOLD 1



Tempering machine
With vibrating table

CAPACITY: 12 kg

CONTINUOUS 3-PHASE TEMPERATURE (45° - 28° - 30° adjustable)


ADVANTAGES

- Economical
- Ultra-compact
- Delayed start
- Washable with water


PRODUCTION

Tempered chocolate: 25 kg/h

Coated bonbons: 60 kg/day

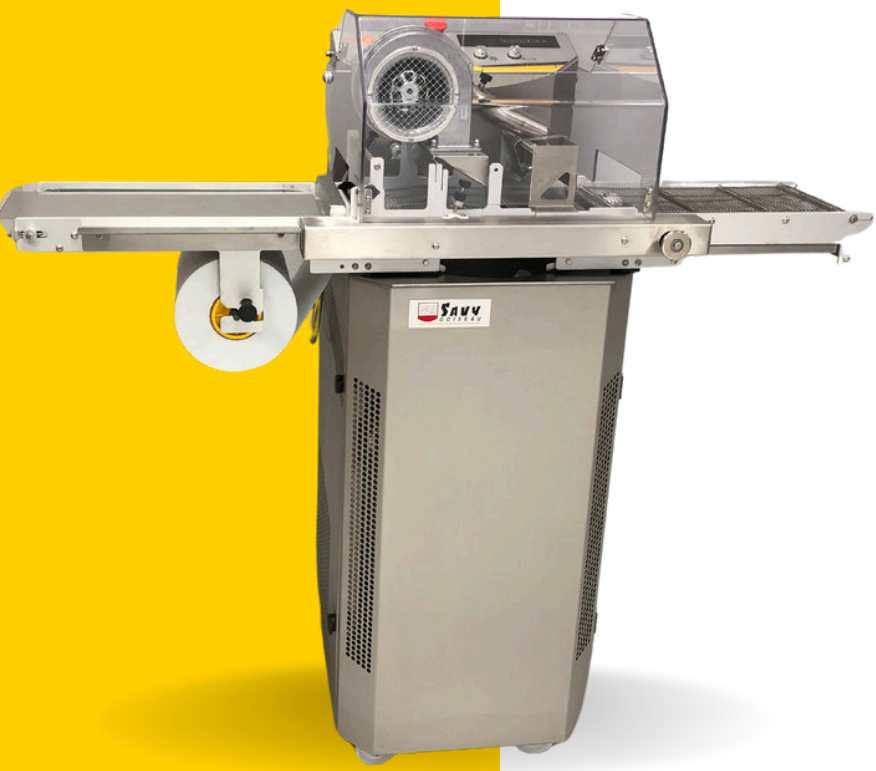

Enrober with CHOCOPLAK conveyor

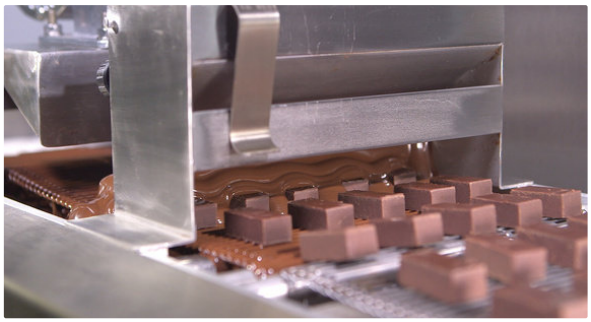

Discover in video

FOR 50 YEARS, MADE IN FRANCE

GOLD 1


TEMPERING - COATING MACHINE

FUNCTIONING

It is equipped with the 3-phase continuous tempering system with adjustment of the 3 settings (45° - 28° - 30°) which avoids any risk of thickening of the cover. Equipped with a conveyor assembly, it transforms into a real coater and with a vibrating table, into a molder.



Touch control panel





TEMPERING

The machine is equipped with a refrigeration unit, a direct expansion exchanger, a tempering plate and the 3-phase tempering system. The controls are electromechanical with no electronics.

Ultra simple and quick cleaning with water

COATING

The variable speed conveyor assembly is centered on the tempering machine. It is composed of a disengageable entry grid, a coating grid, a variable tapping and a pivoting tail cutter. The adjustable chute is 1 sail and the fan is adjustable in height and flow.

The candies are taken directly from the paper.

Partial coating and bottoming optional.

Production of 40 to 50 candies per pass.

MOULDING

Vibrating table adaptable directly to the machine.

Programmable dosage with foot pedal.



Heated vibrating table



CHOCOPLAK conveyor




Paper exit conveyor

CONVEYORS

CHOCOPLAK: The weight driving the paper is supported on 2 toothed belts, the collection plate is already in place when the candies arrive, all you have to do is cut the paper and take the plate with the chocolates.

PAPER EXIT: The chocolates are picked up on the paper driven by the belt of the exit conveyor attached to the coating conveyor. You have to slide the pickup plate then cut the paper.

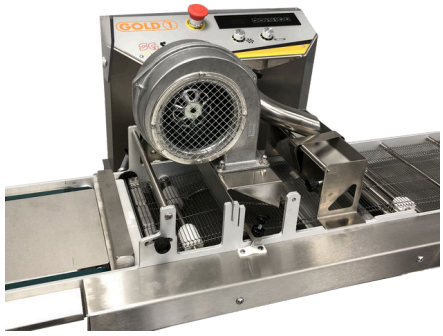

TECHNICAL DATA

Capacity	**12 kg**
Tension	**230V single**
Power	**1700 W**
Width of belt	**180 mm**
Coating height	**35 mm**
Length	**480 mm**
Long. with vibrating table	**860 mm**
Long. with CHOCOPLAK	**1390 mm**
Depth	**490 mm**
Height	**1330 mm**
Temper weight	**95 kg**
Weight with conveyor	**112 kg**